

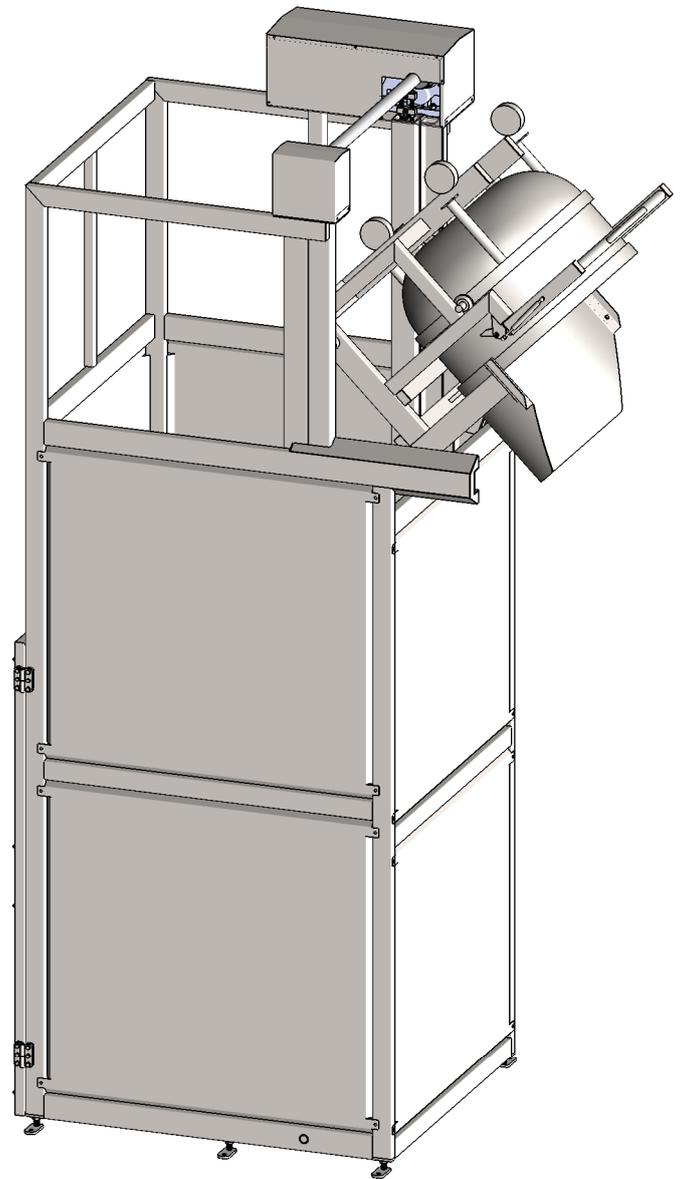


Specifications	
Description	Lifts and tips product into a vessel or hopper
Materials	304 grade stainless steel
Bin type	Mixing bowls
Safe working load	1500kg
Lifting speed	6m/min
Power supply	415 volt (3-phase, neutral and earth, 50Hz, 16 amp)
Control voltage	24V AC
Control type	Automatic operation. Sensor confirms correct position of bowl
Guarding	Fixed sheet panel guards. Doors interlocked with magnetic safety switches
IP rating	IP65 minimum
Machine mass	1600kg maximum

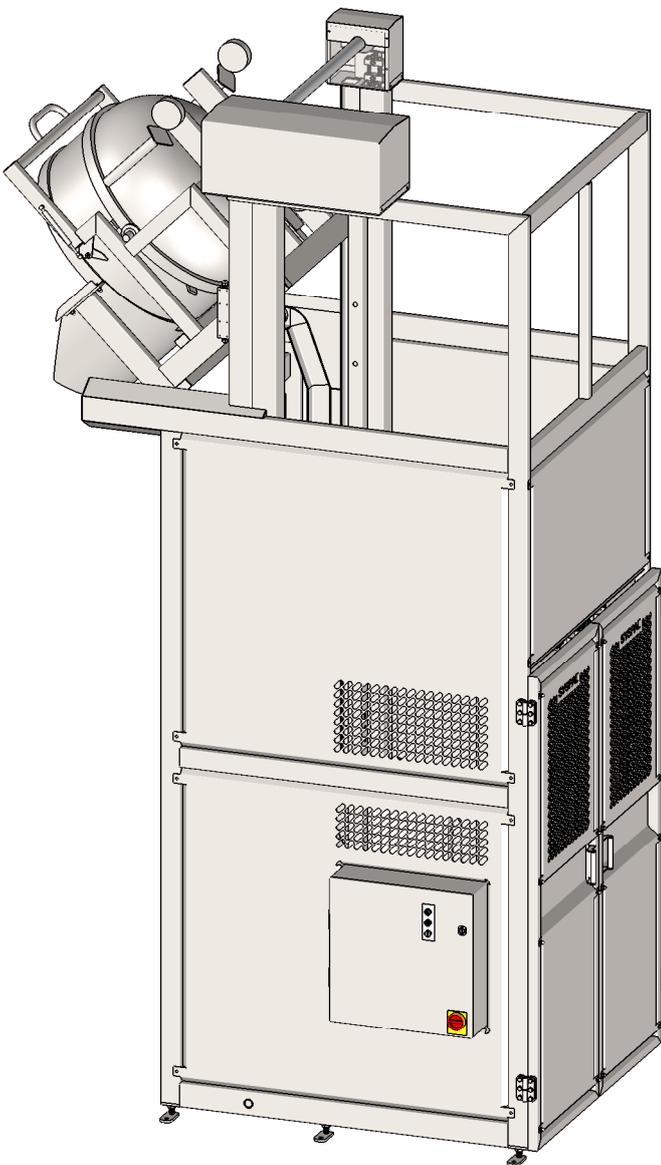

**Information required**

Headroom	Minimum clearance under ceiling, lights, pipes etc
Access for installation	Dimensions of corridors and doorways. Availability of lifting equipment in the area
Bowl type	Overall dimensions and weight of bowl. Manufacturer and bowl type
Product type	Weight of product in the bowl. Name and characteristics of product
Tipping angle needed	30 to 50 degrees, depending on product characteristics
Throughput needed	In tips per hour or kg per hour

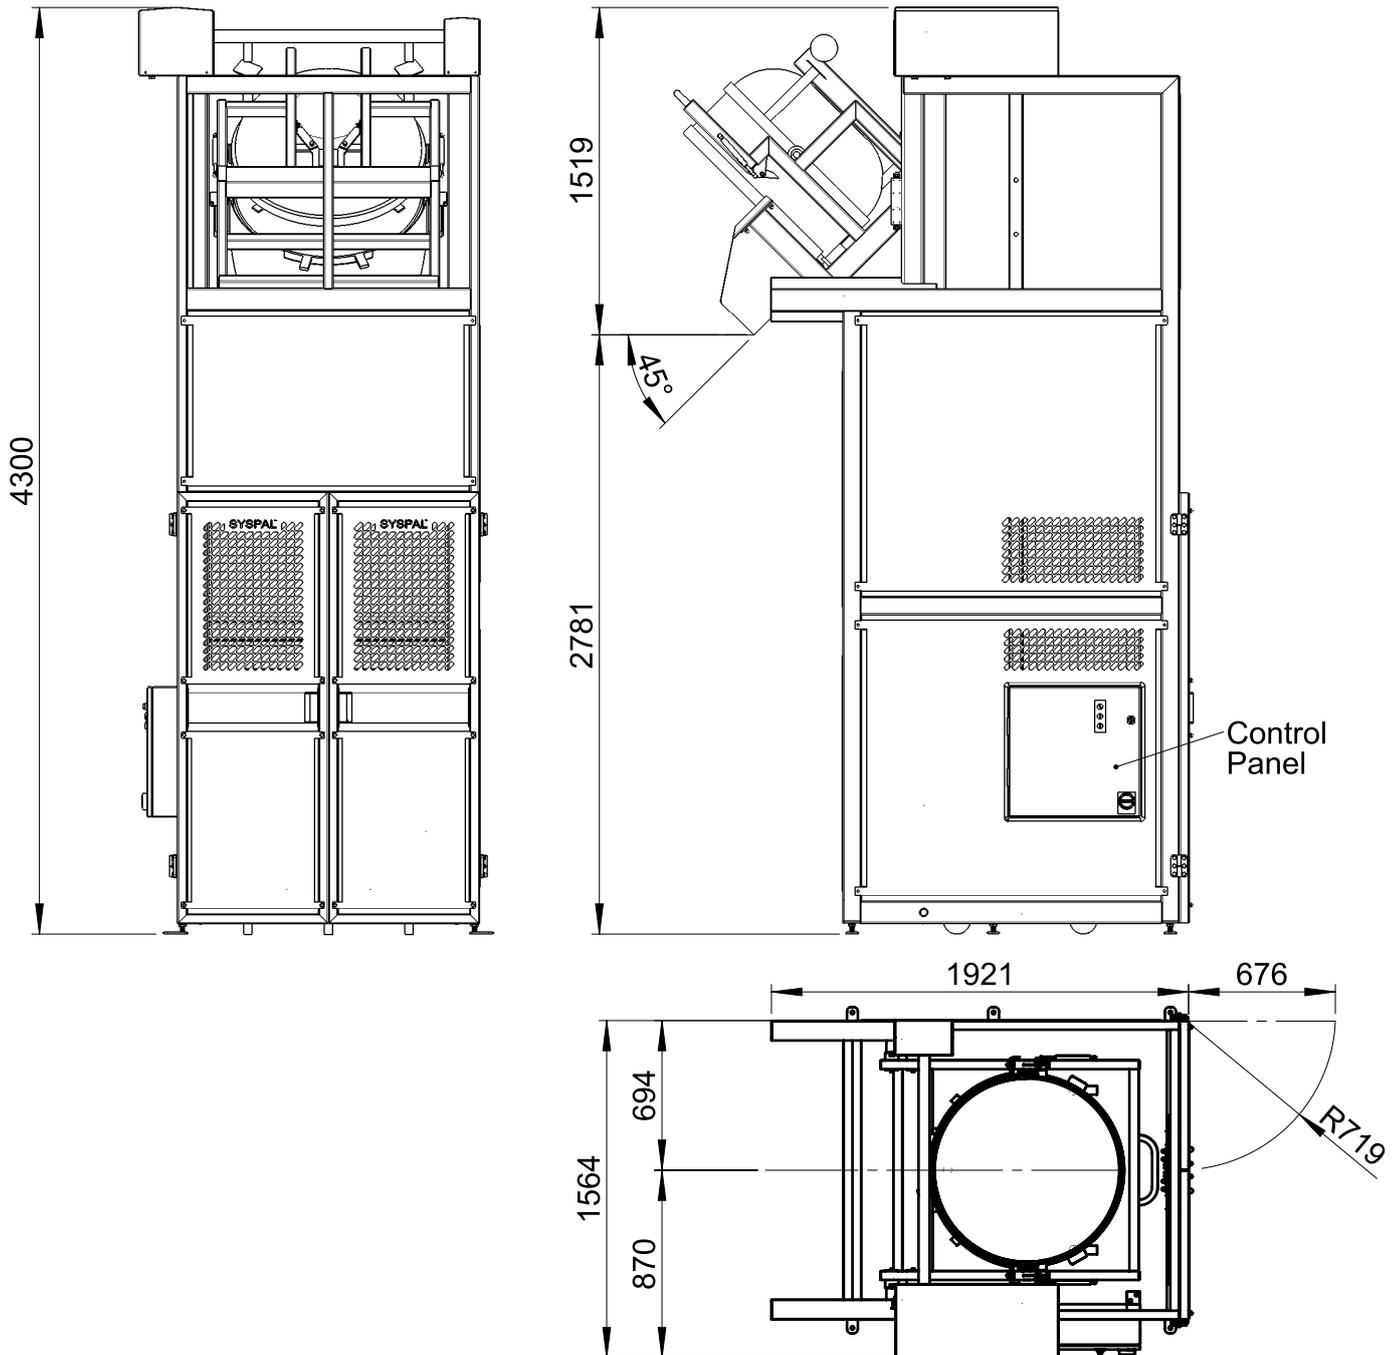

SYSPAL LTD Cockshutt Lane, Broseley, Telford, Shropshire, TF12 5JA, England

t: +44 (0) 1952 883188 f: +44 (0) 1952 884093 e: sales@sypal.com

www.sypal.com

Notes :