
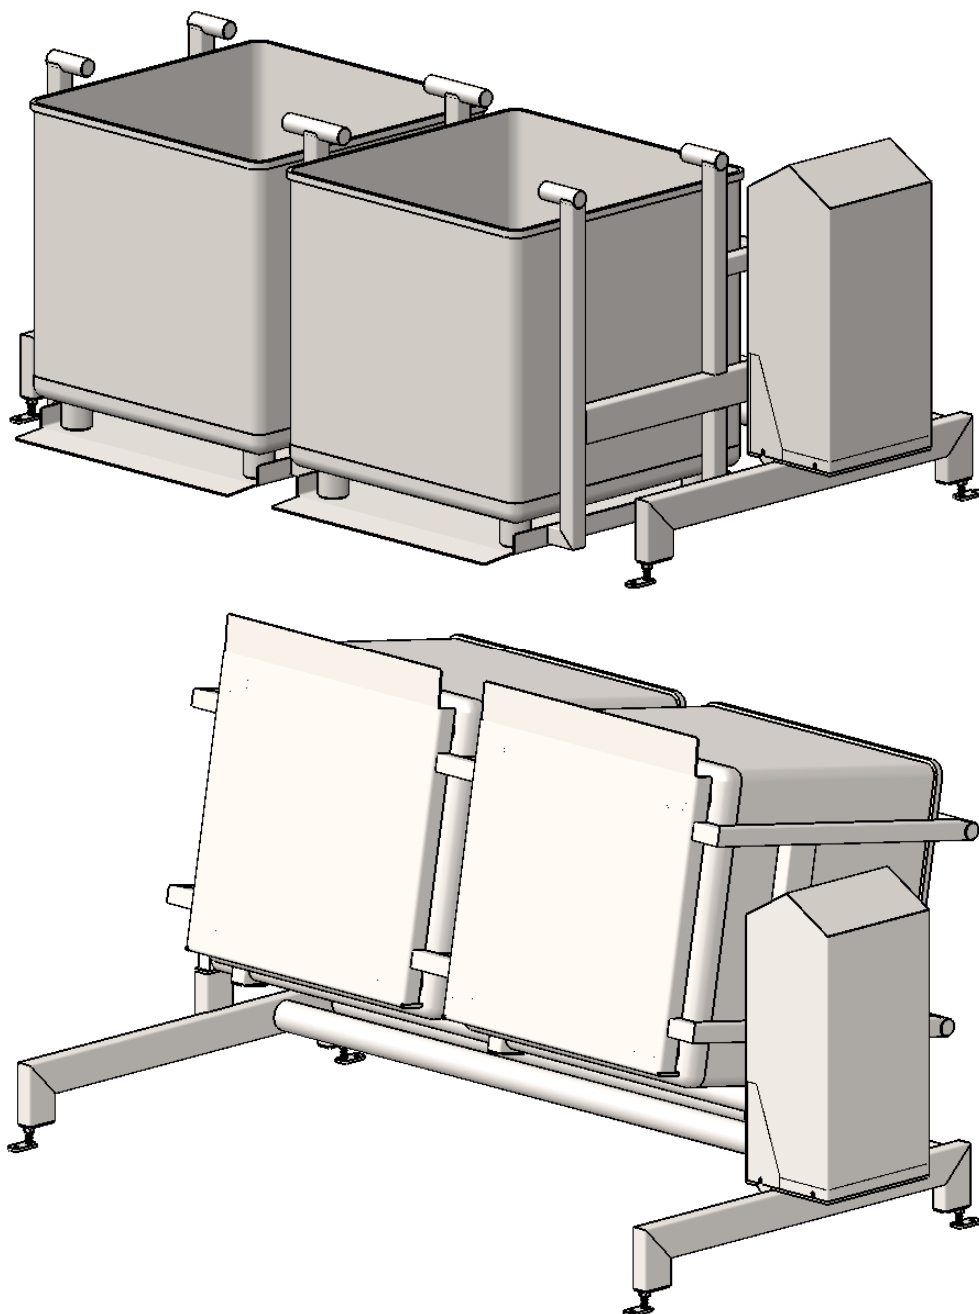


Specifications

Description	Containers and tanks are rotated to aid cleaning using a high reduction gearbox
Bin type	Tanks, containers and mixing bowls
Safe working load	Up to 500kg
Tip angle	100° (10° from horizontal)
Cycle time	30 second, 15s raise, 15s lowering
Power supply	415 volt (3-phase, neutral and earth, 50Hz, 16 amp)
Control voltage	24V AC
Control type and position	Hold-to-run pushbuttons mounted on a remote control panel
IP rating	IP65 minimum
Machine mass	700kg maximum
Materials / finish	304 grade stainless steel, bead blast

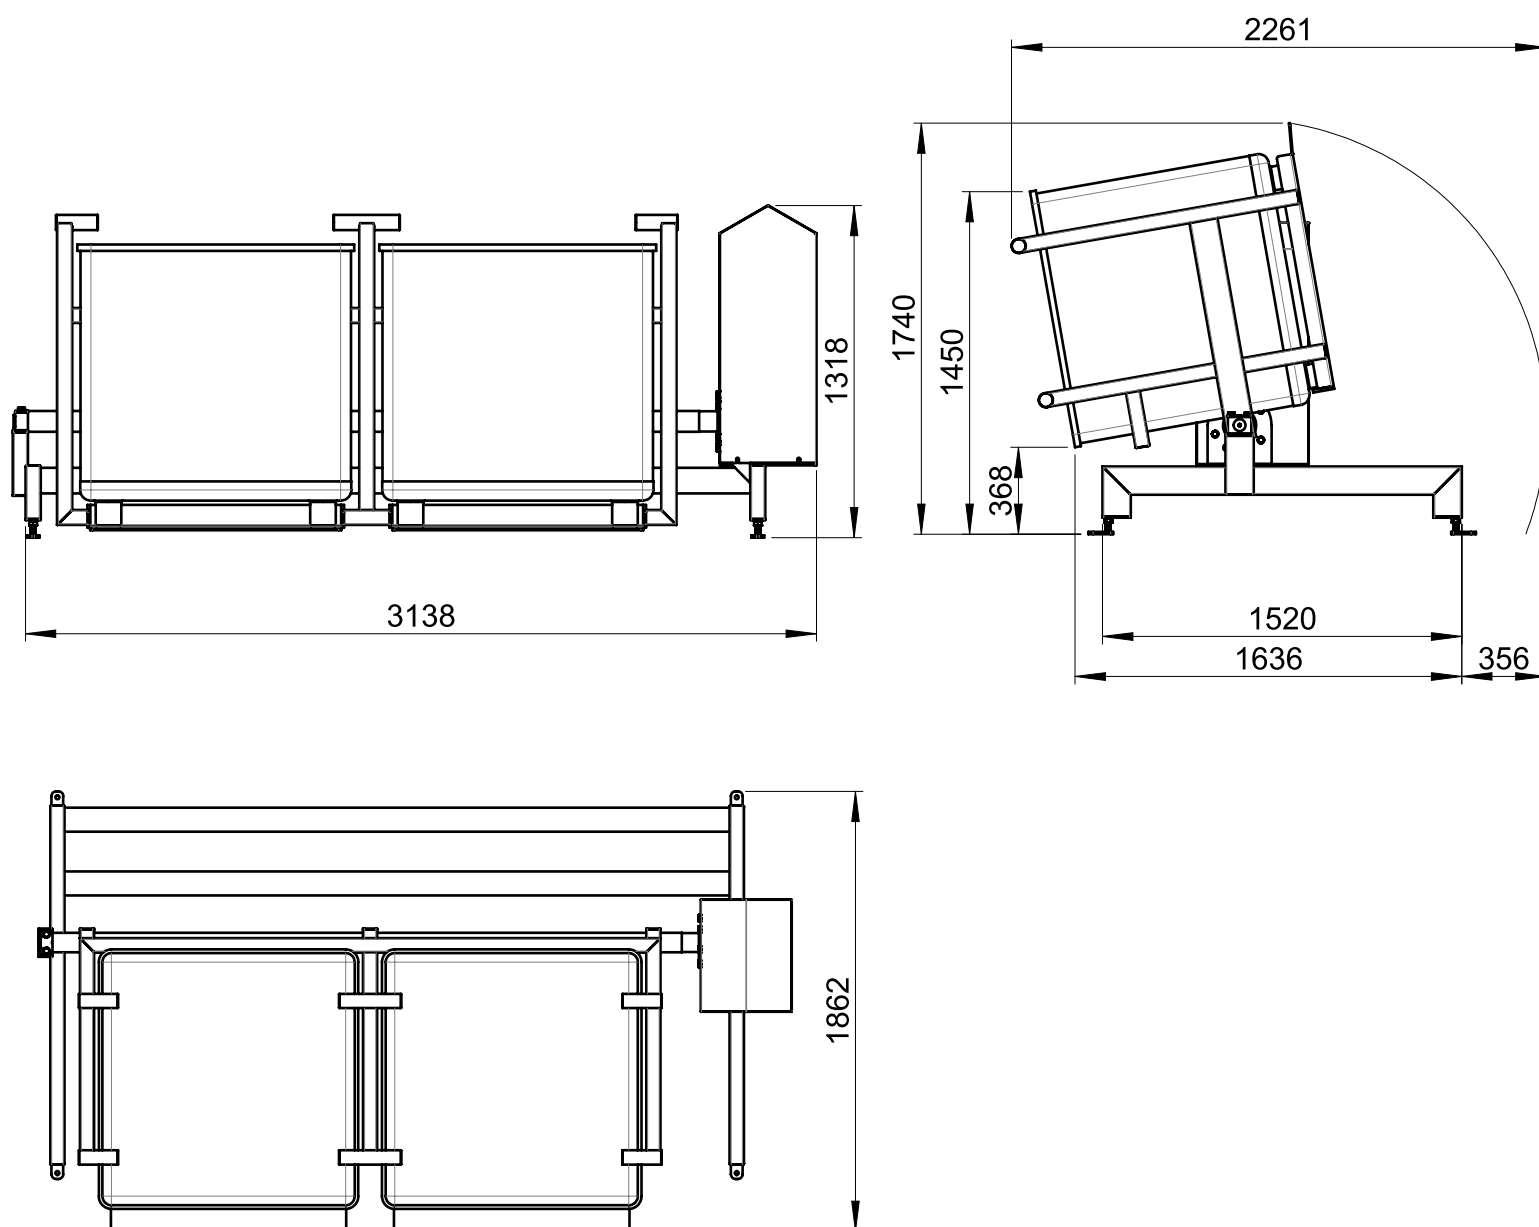

**Information required**

Access for installation	Dimensions of corridors and doorways.
Bowl type	Overall dimensions and weight of container.
Control box location	For instance on an adjacent wall



SYSPAL LTD Cockshutt Lane, Broseley, Telford, Shropshire, TF12 5JA, England

t: +44 (0) 1952 883188 f: +44 (0) 1952 884093 e: sales@sypal.com

www.sypal.com

Notes :