



Specifications	
Description	Lifts and tips trays of product into a hopper or conveyor
Bin Type	Most sizes of trays
Safe working load	25 kg
Lifting speed	24m/min (400mm/second)
Power supply	415 volt, 3PH, 50Hz
Control voltage	24V AC
Operating environment temperature	-10°C to 40°C
Controls	Automatic
Drive type	Braked gear motor and timing belt
IP rating	IP65 minimum
Safety features	Magnetic safety switches on drop-down gates. Solenoid lock switch on access door. Light sensor prevents operation if tray is out of position.

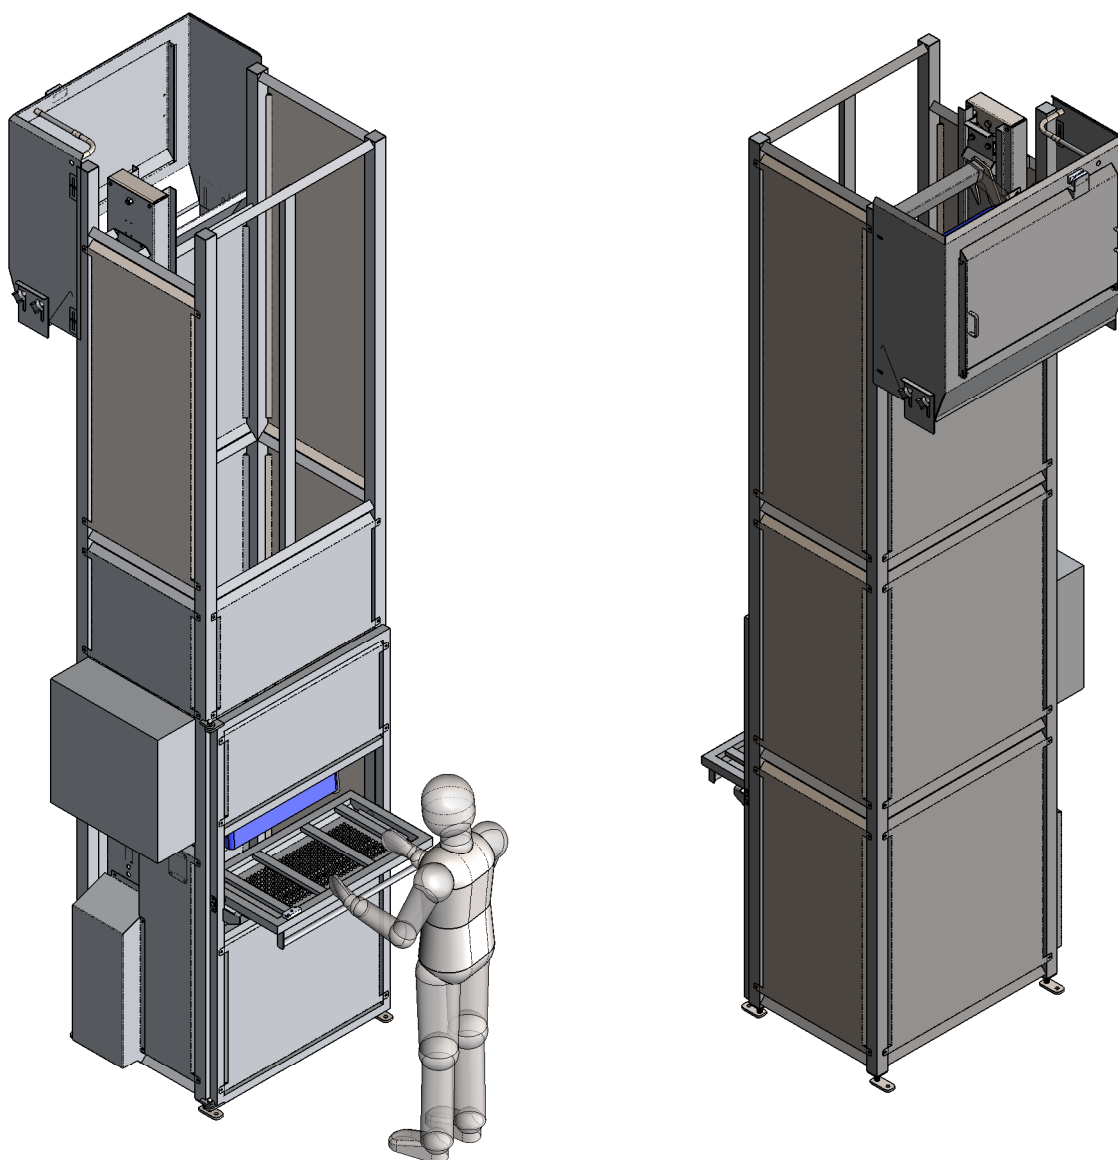

**Information required**

Headroom	Minimum clearance under ceiling, lights, pipes etc
Access for installation	Dimensions of corridors and doorways. Availability of lifting equipment in the area
Tray type	Overall dimensions
Outfeed	Hopper height
Throughput	Required throughput in kg per hour
Product type	Product name, characteristics and bulk density

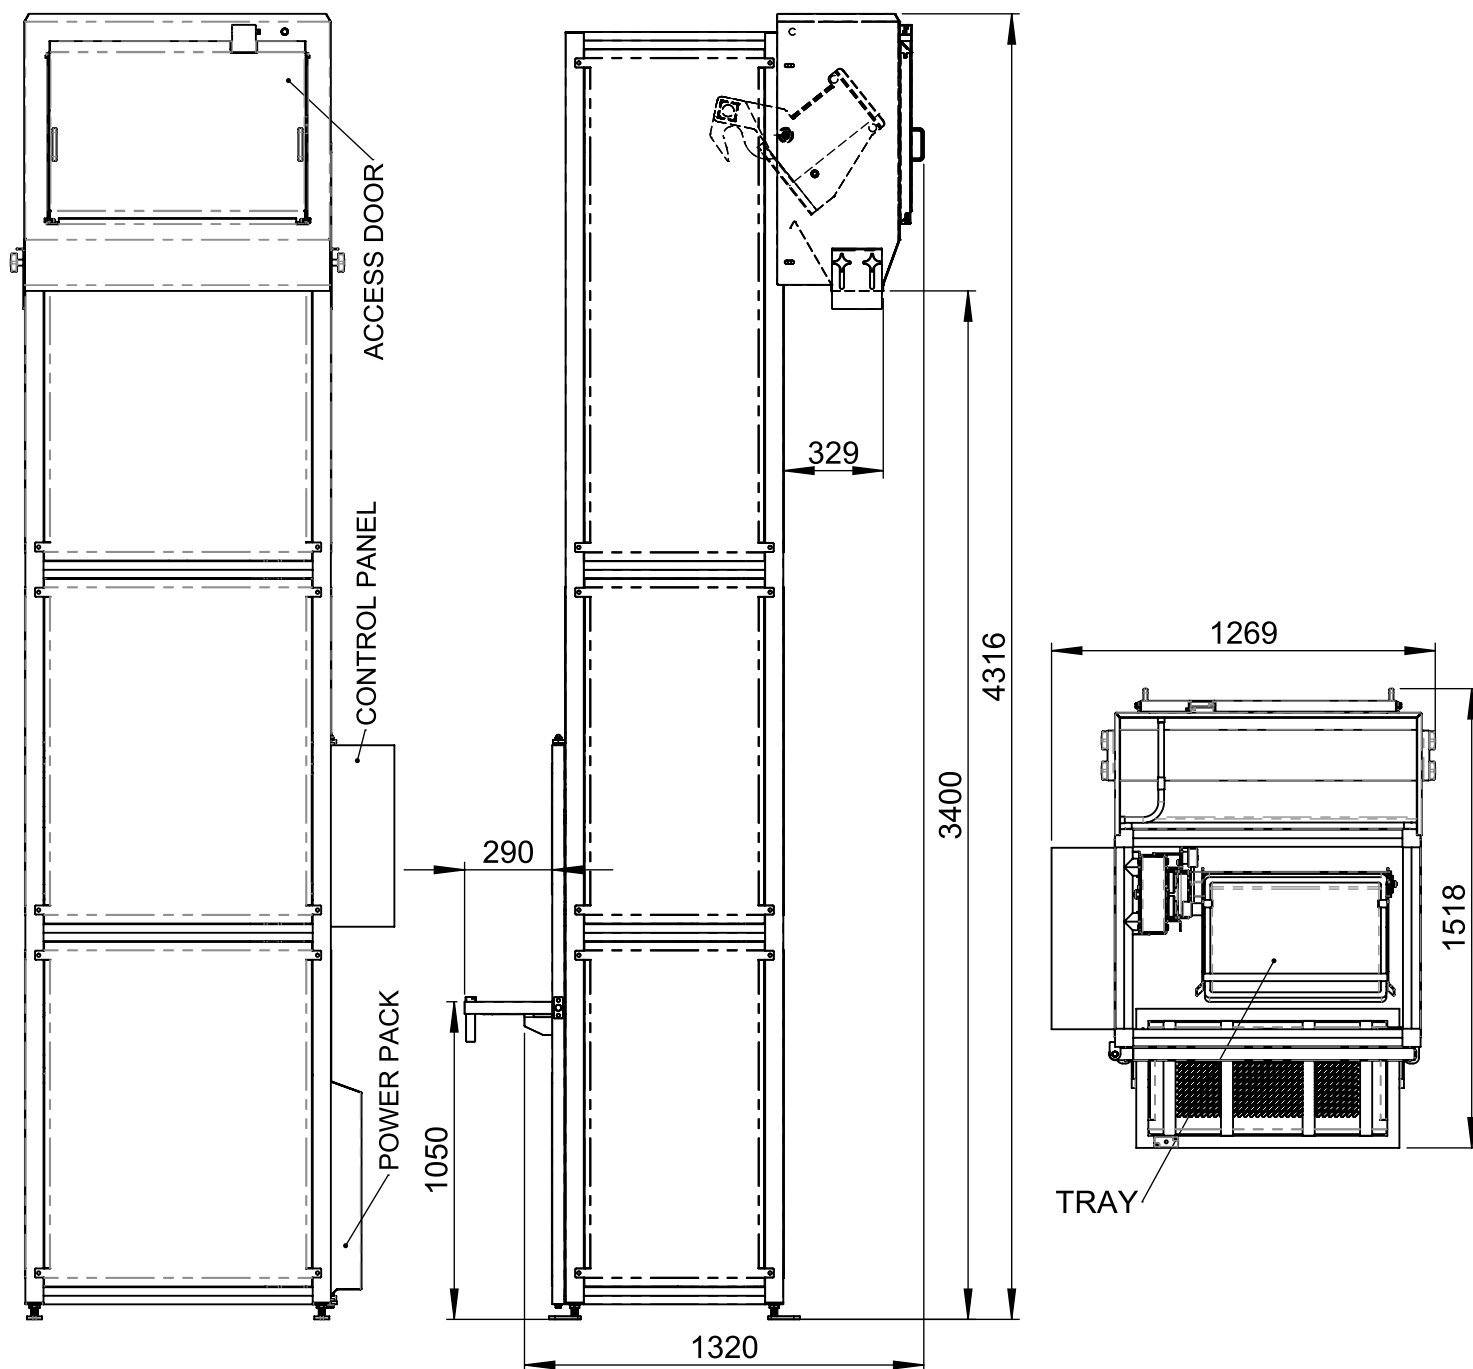

SYSPAL LTD Cockshutt Lane, Broseley, Telford, Shropshire, TF12 5JA, England

t: +44 (0) 1952 883188 f: +44 (0) 1952 884093 e: <mailto:sales@syspal.com>

www.syspal.com