





| Specifications                     |  |
|------------------------------------|--|
| Description                        | Lifts and tilts to aid unloading of small containers |
| Materials                          | 304 grade stainless steel                            |
| Bin Types                          | Drums, Barrels and similar containers                |
| Safe working load                  | 350kg  |
| Tip angle                          | Up to 125°   |
| Power supply for recharging        | 240V single phase, 50Hz, 13 amp                      |
| Battery, motor and control voltage | 12V DC   |
| Operating environment temperature  | -10°C to 40°C  |
| Controls                           | Hold to run push buttons                             |
| Drive type                         | Battery powered hydraulics                           |
| Mass                               | 280kg  |

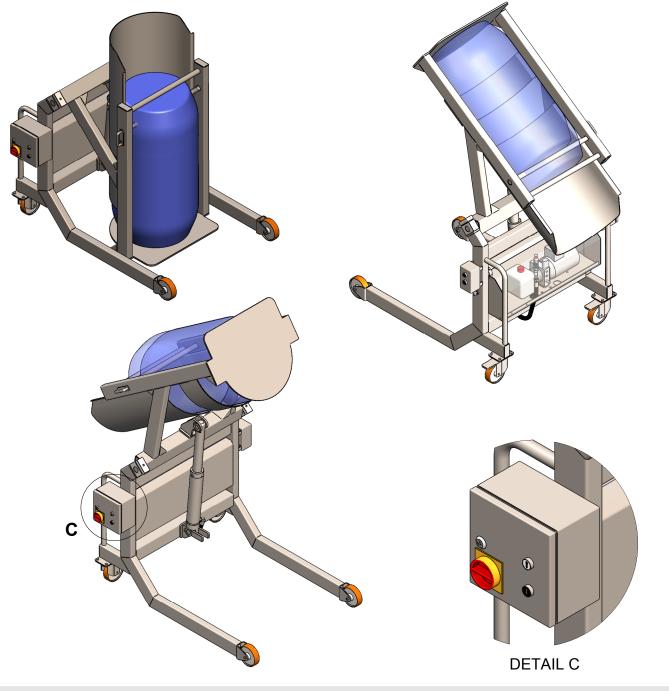

## SYSPAL<sup>™</sup>

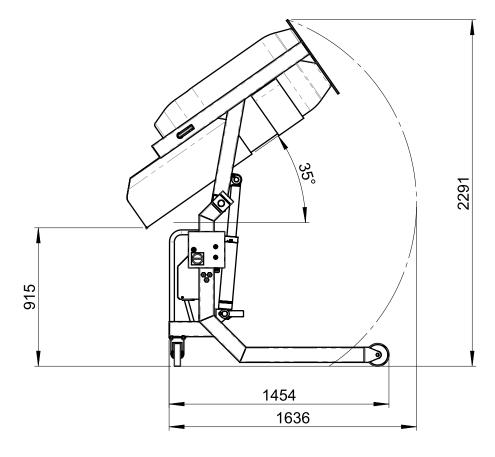

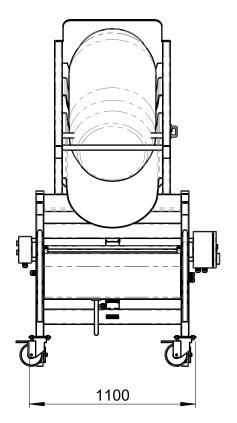

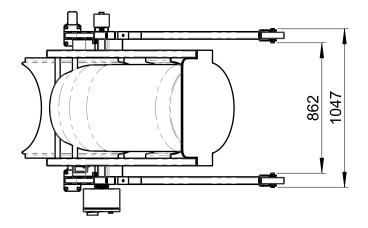

| Information required |   |
|----------------------|---|
| Container            | Overall dimensions, weight, diameter of opening                         |
| Product type         | Weight of product in the container. Name and characteristics of product |
| Charger type         | Either non-IP rated (to be used in a dry area) or IP 65                 |



SYSPAL LTD Cockshutt Lane, Broseley, Telford, Shropshire, TF12 5JA, England

t: +44 (0) 1952 883188 f: +44 (0) 1952 884093 e: <a href="mailto:sales@syspal.com">mailto:sales@syspal.com</a>

www.syspal.com



Notes :