



Specifications	
Description	Lifts and tips product onto an acceptance table or hopper
Materials	304 grade stainless steel
Bin Type	Containers such as Dolavs, pallet boxes and palletainers
Safe working load	1500kg
Standard tip angles	Up to 125°
Battery version - charger power supply	240V single phase, 50Hz, 13 amp
Battery version - motor and control voltage	12V DC
Battery version - IP rating	Controls in IP55 enclosure. Battery and hydraulics in ventilated enclosure
Mains supply version - supply	415 volt (3-phase, neutral and earth, 50Hz, 16 amp)
Mains supply version - control voltage	24V AC
Mains supply version - IP rating	IP55 minimum
Controls	Hold to run push buttons on both sides

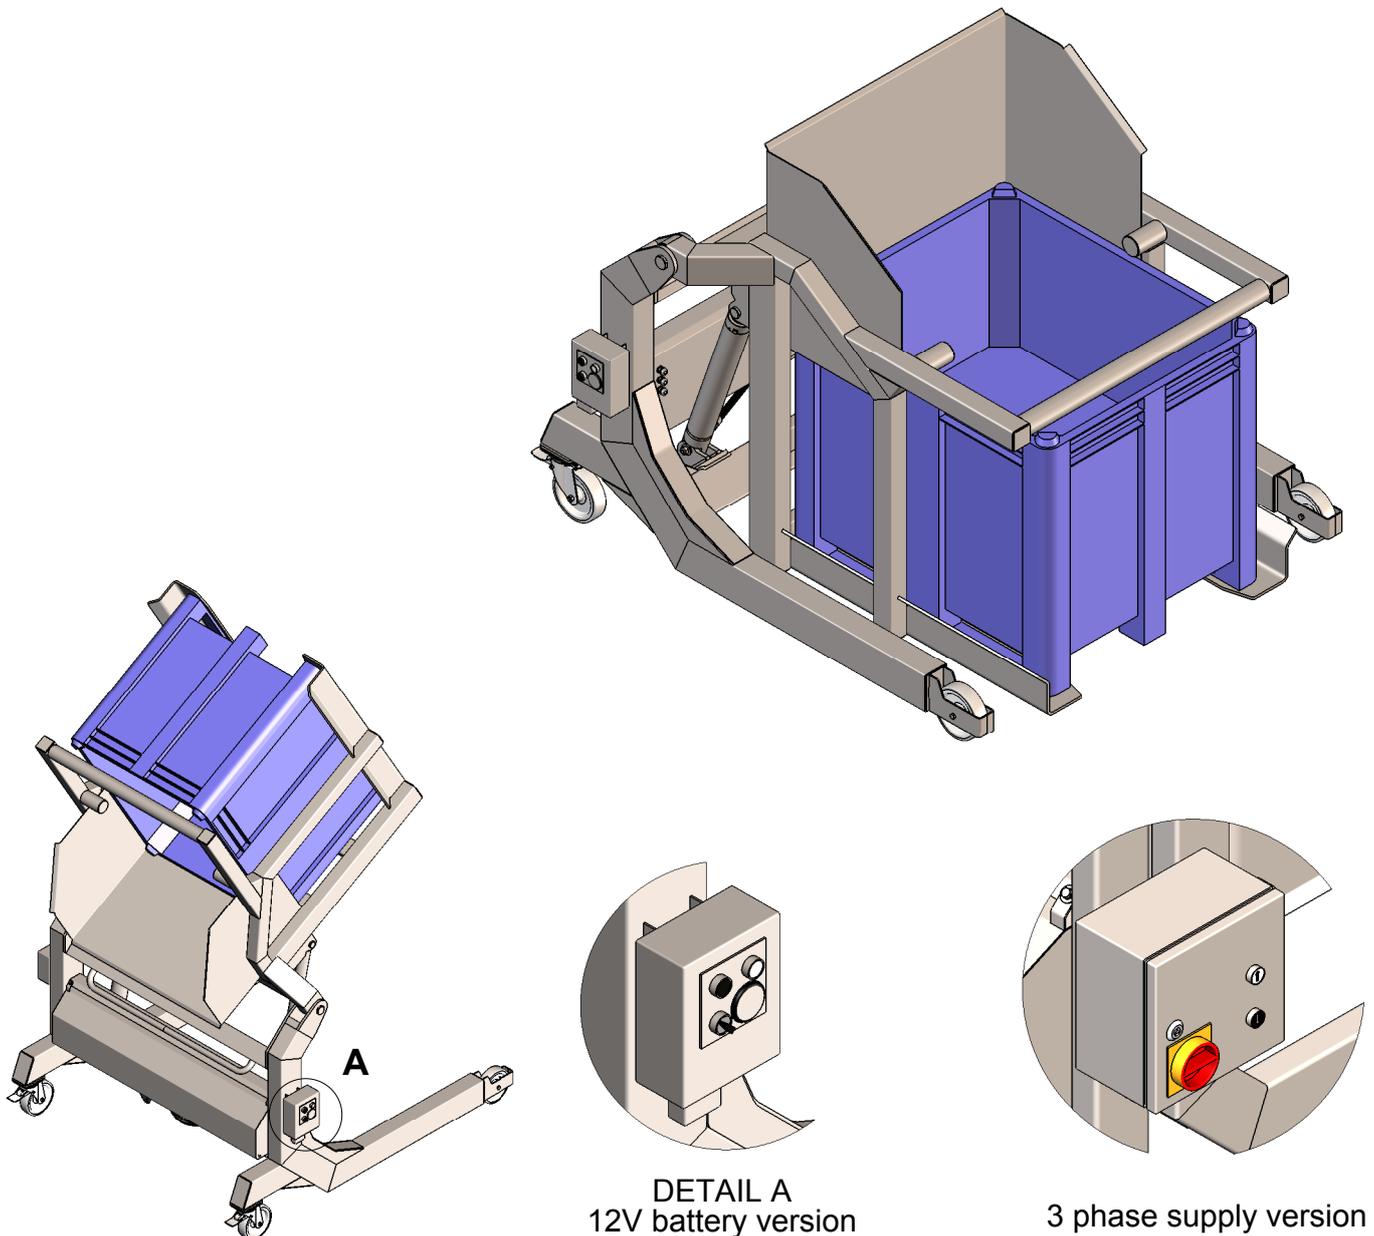

DETAIL A
12V battery version

3 phase supply version

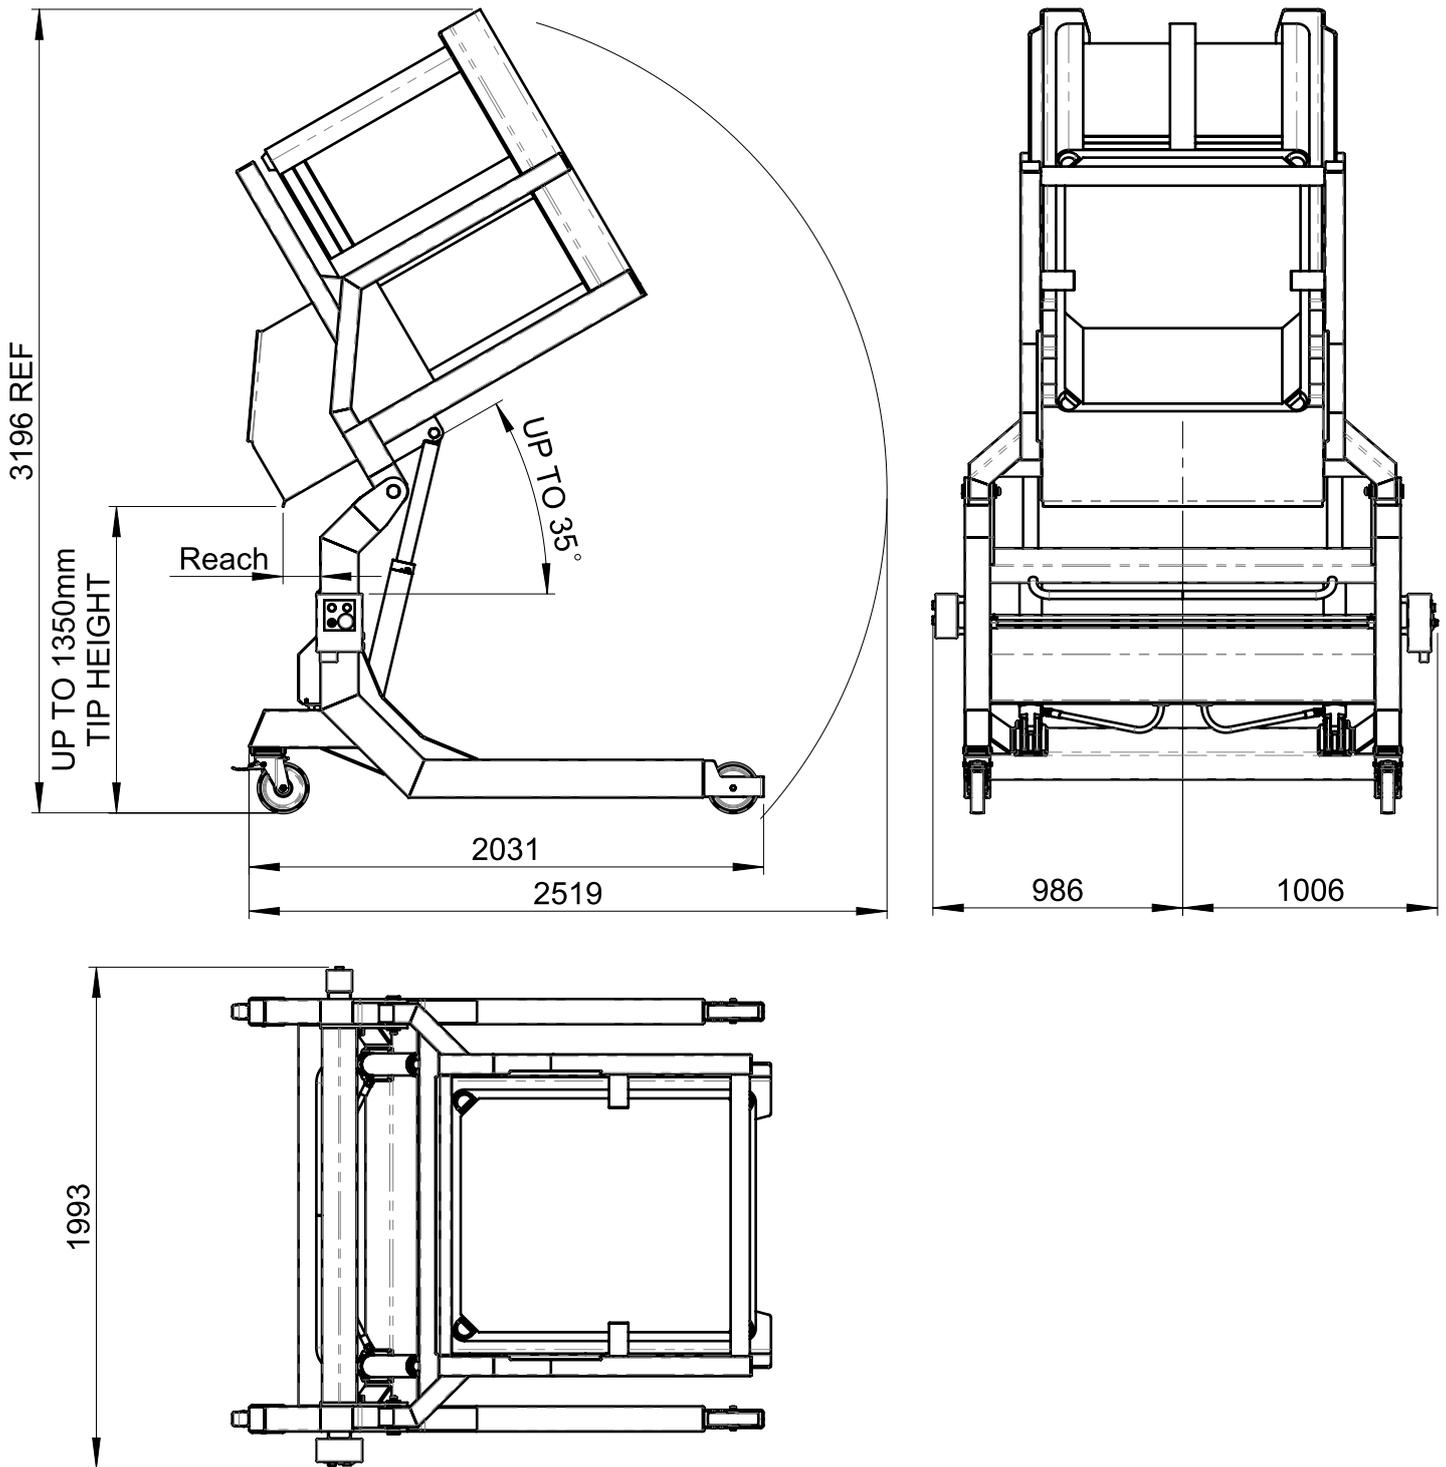

Information required	
Product type	Name and information of the product
Tip height	Height and angle of chute required
Reach	The horizontal distance needed between tipper and receiving hopper / table

SYSPAL LTD Cockshutt Lane, Broseley, Telford, Shropshire, TF12 5JA, England

t: +44 (0) 1952 883188 f: +44 (0) 1952 884093 e: <mailto:sales@sypal.com>

www.sypal.com

Notes :